

FOR THIS PLANTING:  
EACH TREE SHALL RECEIVE A  
MINIMUM VOLUME OF 800 CF  
OF STRUCTURAL SOIL  
INSTALLED PER THIS DETAIL  
AND DEPTH SHOWN

PERMEABLE PAVERS TO BE  
REMOVED AS TREE GROWS

GEOTEXTILE

CURB SECTION  
PER CIVIL

REMOVE ALL  
STRINGS, TAGS,  
TIES AND POLES  
FROM TREE PRIOR  
TO PLANTING.

18" MAX


2" THICK ORGANIC MULCH (NO CYPRESS MULCH)  
DO NOT PILE MULCH  
AGAINST TREE TRUNK

PERMEABLE PAVERS  
PER CIVIL

STRUCTURAL SOIL  
24" MINIMUM DEPTH  
REQUIRED

DRAINAGE TO STORM SEWER VIA  
PERFORATED PIPE. BOTTOM OF DRAIN  
SHALL BE LOCATED 6" ABOVE TOP  
OF SUBGRADE.

SUBGRADE

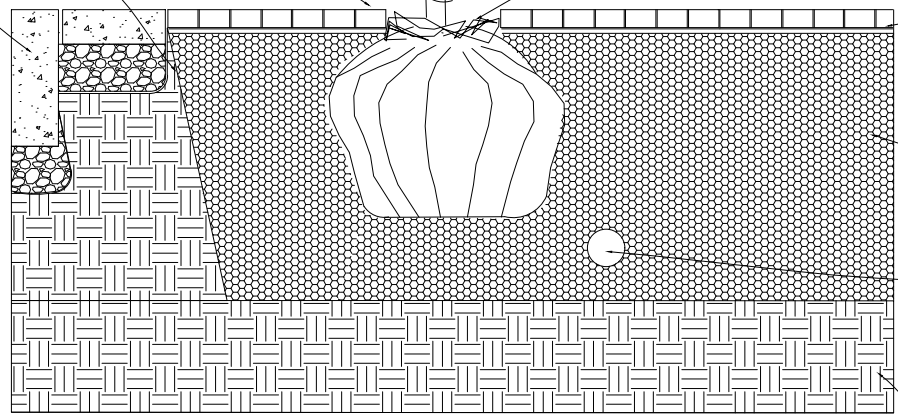

TREE WELL WITH STRUCTURAL SOIL AND PERMEABLE PAVERS DETAIL

SCALE: NOT TO SCALE